

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
05380003AA

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

CABLE DROP MONITOR WITH UPSTREAM SIGNALLING

and invented by:

Warren L. Braun**If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:**☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 27 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
05380003AA

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
a. ☐ Formal b. ☒ Informal Number of Sheets 3
4. ☒ Oath or Declaration
a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
c. ☒ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission *(if applicable, all must be included)*
a. ☐ Paper Copy
b. ☐ Computer Readable Copy
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & documents)*
9. ☐ 37 CFR 3.73(b) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail *(Specify Label No.):* HAND DELIVERED

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
05380003AA

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	23	- 20 =	3	x \$9.00	\$27.00
Indep. Claims	2	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$372.00

- ☒ A check in the amount of \$372.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 23-1951 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:


Signature

Marshall M. Curtis
Reg. No. 33,138
Whitham, Curtis & Whitham
11800 Sunrise Valley Drive - Suite 900
Reston, VA 20191
(703) 391-2510

CC:

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27 (b)) - INDEPENDENT INVENTOR**

Docket No.
0538003AA

Serial No.
Not Assigned

Filing Date
Concurrently

Patent No.

Issue Date

Applicant/ **Warren L. Braun**
Patentee:

Invention: **CABLE DROP MONITOR WITH UPSTREAM SIGNALLING**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled above and described in:

- ☒ the specification to be filed herewith.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern or organization exists.
☐ Each such person, concern or organization is listed below.

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

FULL NAME

ADDRESS

- ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME

ADDRESS

- ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME

ADDRESS

- ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME

ADDRESS

- ☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR Warren L. Braun

SIGNATURE OF INVENTOR Warren L. Braun

DATE: 6/20/2000

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

CABLE DROP MONITOR WITH UPSTREAM SIGNALLING

DESCRIPTION

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention generally relates to
signal distribution systems such as cable access
television (CATV) systems and, more particularly,
to cable customer drop condition monitoring and
upstream communications for condition reporting.

10 Description of the Prior Art

 Cable access television (CATV) is in
widespread use and large systems for distributing
large numbers of channels of programming from a
central facility to large numbers of subscribers
15 have been installed in at least most metropolitan
areas of the United States. At present, there is
substantial interest in using the cable facilities
for additional purposes that may involve
transmission from subscribers to the central
20 facility such as Internet access, home shopping,
interactive programming and the like in view of
the large band width available thereon. Numerous
arrangements have been proposed to provide or
adapt CATV systems to permit bi-directional
25 signalling over the cable facilities.
Communications from subscribers to a central
facility or subdivisions thereof has become
generally referred to as "upstream"
communications.

30 Such proposals have generally been
characterized by complexity and large expense of

000000-000000

the subscriber hardware which may or may not be justified by the subscriber's needs. Certainly, the subscriber hardware necessary for upstream communications is beyond that which is

5 economically feasible to include as a standard feature of subscriber installations at the present time since CATV systems may service several hundred thousand subscribers, and particularly

10 because only a small fraction of subscribers may wish to have upstream communication capability in an original installation. The provision for upstream communications in a device additional to the standard set-top box (STB) is also inconvenient and unsightly and significant

15 customer resistance to such an arrangement is anticipated.

At a much more basic level, however, CATV systems have substantially become utilities for service to a large fraction of the public.

20 Accordingly, it is desirable to monitor the condition of subscriber hardware, sometimes referred to as a cable drop or terminal unit. If the cable drop cannot be kept in service, a refund of a portion of subscriber fees may be required to

25 reflect the loss of service to the subscriber. In such a case, it is important for the CATV system operator to be able to document substantially exact periods during which service was not provided.

Such information, including frequency of loss of functionality is also important to scheduling of maintenance and, perhaps more importantly, to relationships with subscribers. Of course, reliability of any monitoring system is of

35 paramount importance and large operating margins are very desirable but have generally implied a trade-off with the signal distribution system

00000000-00000000

capacity to provide other upstream communications that may be desired as well as acceptably high frequency of polling of each individual cable drop. By the same token, provision for
5 maintaining the monitoring system itself is desirable and the reduction or interruption of monitoring capacity during such maintenance may compromise the monitoring function.

While the amount of information derived from
10 condition monitoring of cable drops may be relatively less than might be required for other types of upstream communications over the CATV system, more or less continuous monitoring of cable drop condition implies a need for
15 substantially continuous and simultaneous upstream communications from all (e.g. up to one hundred thousand) subscribers over a communication link. Functionally simultaneous communications from such a potentially large number of subscribers presents
20 difficulty in identifying specific communications from individual subscribers or cable drops.

For example, frequency multiplexing requires wide bandwidth since the frequencies used must be well-separated and cannot be harmonically related.
25 Time multiplexing requires a large number of time slots which must each be substantially larger than transmission delay over the system to avoid ambiguity. Coded communications requires decoders of substantial complexity and an increased amount
30 of data (to identify the subscriber), both communicated and stored, as well as some synchronization of transmissions. All of these and other techniques proposed to date also present difficulties in integration with or retrofitting
35 to existing systems.

Further, any upstream communication facility requires transmission circuits to be effectively

000000-000000

provided in each cable drop and the expense cannot generally be passed along to the subscriber. Moreover, such monitoring must not interfere with the capacity of the CATV system to provide other services that involve upstream communications that particular subscribers may desire and which are likely to be in much greater demand in the near future. At the current state of the art, there has been no proposal which can simultaneously satisfy these communications requirements for even rudimentary monitoring of cable drop condition, particularly in regard to the prohibitive cost of providing such facilities individually for large numbers of cable drops.

If such monitoring could be provided, however, valuable services could be rendered to the customers and to the public at large. For example, subscriber sets for CATV systems obtain power from electrical utilities and power outage could be resolved to individual residences through the CATV system. (The CATV provider also has an interest in maintaining service to its subscribers and, further, the CATV system may be a source of emergency information to the public which must be maintained in the interest of the public safety.) Additionally, knowledge of the availability of power to CATV systems is a necessary incident of remote diagnostics of the cable drop condition, regardless of what other operational conditions may or may not be monitored. While the above problems are particularly evident in regard to CATV systems at the present time, it is evident that the nature of other signal distribution or communication systems may present similar difficulties in remote monitoring of the condition of individual subscriber equipment.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a system for monitoring signal distribution systems at the level of individual subscriber facilities and to provide upstream communication of information indicating monitored operating conditions.

It is another object of the present invention to provide an upstream communication system for limited information from all subscribers of a signal distribution system at very small additional cost per subscriber.

It is a further object of the invention to provide for upstream communication of data in a signal distribution system sufficient for monitoring operating condition of individual subscriber drops without significantly reducing the capacity of the signal distribution system to carry other upstream communications and with flexible and potentially large operating margins.

It is yet another object of the invention to provide a system for limited upstream communications which can be implemented in a phased fashion and which does not compromise monitoring capacity during maintenance periods.

It is another further object of the invention to provide for continuous cable drop monitoring independent of power availability which does not interfere with any other upstream or downstream communications over a signal distribution cable system.

It is another further object of the invention to provide a cable drop monitoring system which can be implemented inexpensively with existing hardware and integrated circuits.

In order to accomplish these and other objects of the invention, a signal distribution system is provided including a communication path between a central facility including a signal source to a plurality of cable drops, a condition detector at each of the plurality of cable drops, an arrangement preferably in the nature of a telephone dialer for providing a sequence of tones responsive to the condition detector, an arrangement for coupling the sequence of tones to the communication path during a time slot determined by a time base, and means for decoding the sequence of tones at the central facility.

In accordance with another aspect of the invention, a method of monitoring a plurality of terminal units of a system is provided including the steps of assigning a time slot of a plurality of sequential time slots to each terminal unit of a group of terminal units, selectively coupling a signal including a sequence of tones to a communication link of the system in a time slot corresponding to a terminal unit based on a detected condition, and identifying a terminal unit in accordance with the sequence of tones at a central facility and synchronized with the time slots.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, aspects and advantages will be better understood from the following detailed description of a preferred embodiment of the invention with reference to the drawings, in which:

Figure 1 is a schematic depiction of a cable access television system including the invention,

Figure 2 is a schematic depiction of a communication link from a subscriber drop to a central facility in accordance with the invention,

Figure 3 is a schematic depiction of a four-way directional coupler including an upstream communication facility and power arrangement in accordance with the invention, and

Figure 4 is a schematic depiction of a cable drop in accordance with the invention.

ORIGINAL RECORDED

DETAILED DESCRIPTION OF A PREFERRED
EMBODIMENT OF THE INVENTION

Referring now to the drawings, and more particularly to Figure 1, there is shown a
5 schematic depiction of a cable access television (CATV) signal distribution system 10 in accordance with the invention. It should be understood, as will be described in greater detail below, that Figure 1 also depicts the typical extent of
10 existing CATV systems forming the preferred environment of the invention. However, since Figure 1 also illustrates the cooperation of the invention with this preferred environment, no portion of Figure 1 is admitted to be prior art in
15 regard to the invention. It should also be understood that the CATV system in Figure 1 is represented at a high level of abstraction in order to emphasize the general organization of the CATV system in regard to a current maximum limit
20 of one hundred twenty thousand subscribers. If service to a greater number of subscribers must be provided, the arrangement of Figure 1 may be replicated any number of times.

The CATV system 10 is depicted in Figure 1 in
25 circular form since the maximum signal path is generally limited to about twenty miles between a central station 12 and the subscriber 14 most distant therefrom in order to limit signal propagation time to less than two hundred
30 microseconds. The CATV system is also divided into twenty sectors or subsections 16 to limit the requirements for powering, signal regeneration and the like by substantially equalizing the subscriber load between subsections.

35 The conventional (downstream) transmission path of each sector is schematically shown in

sector or subsection 16a and it should be understood that similar structure is provided in each subsection 16. Details of the downstream link are not critical and may differ somewhat between sectors and between CATV systems. The upstream link in accordance with the invention will be discussed below in regard to the symbolic illustration thereof in sector 16b and is similarly provided in each sector 16 and superimposed on the downstream link 16a as shown in more detail in Figure 2. As with the downstream link, the details of implementation of the upstream link are not critical to the practice of the invention and may vary somewhat between sectors and CATV systems while conforming to the basic principles of the invention.

Since the CATV system 10, by convention, can have a maximum of one hundred twenty thousand subscribers, one sector or subsection 16 is limited, again by convention, to six thousand subscribers, collectively indicated at 40. The central station 12 will, of course, include a source of programming 100 which provides an input to subsection transmitters 17 and is applied to various branch lines of the subsection and which may contain repeaters, amplifiers and other circuits to maintain signal quality, collectively indicated at 30. The branch lines will also include powering points, collectively indicated at 18 which contain circuits for deriving power from the transmitted signal for active circuits in the branch lines which provide the signal to each directional coupler 14 (generally a four-way directional coupler) in section 16a and thence to the individual cable drops connected thereto.

Thus, in summary, each subsection or sector may have a maximum of six thousand subscribers or

00000000.000000

0359542-062300

cable drops and operates independently of and in parallel with all other sectors of CATV system 10 which together can provide a maximum of one hundred thousand cable drops. Since the subsections operate independently, however, the subdivisions 16 of system 10 must be observed in any upstream signalling arrangement. However, six thousand functionally simultaneous upstream transmissions is far too large to accommodate with frequency or time division multiplex or coded communications arrangements while meeting other criteria for a cable drop monitoring system; a significant requirement being the capability of accommodating other upstream communications which could be provided for the use of subscribers. Accordingly, the communication burden on the system due to the monitoring system must be minimized while providing operating margins that will yield a robust and reliable system.

These qualities are developed through the provision of two key features of the invention in accordance with its basic principles thereof as will now be described with reference to sector 16b of Figure 1 as detailed in Figure 2. First, a universal time base 110 is provided at each directional coupler 14 and at the central facility which will be used in several ways that will be described below. Second, a relatively low frequency carrier signal can be easily and economically derived from a low cost crystal oscillator and a divider chain which will not interfere with other upstream or downstream communications. The invention thus preferably employs a 25 KHz carrier which can be derived from a crystal oscillator (such as is readily commercially available and a divide-by-100 circuit which is also commercially available at low cost.

It is considered important to the robustness flexibility and economy of the invention that frequency multiplexing is not relied upon at any point in the upstream communications link. The upstream link provides a time slot for each cable drop and implemented from the directional coupler 14 with a frequency-based code to identify the individual cable drops in a simple manner which will now be explained. The time slot duration is not particularly critical to the practice of the invention but a one-second time slot per cable drop is considered to provide convenience, good operating margins in the context of existing and commercially available circuits and substantial flexibility of implementation with acceptably frequent polling of the cable drops.

Specifically, it is preferred to use a frequency-based coding system similar or identical to that used for "touch-tone" telephone dialling. This arrangement utilizes only seven frequencies in pairs to cover ten or twelve discrete characters (e.g. numerals 0 to 9, * and #). These frequency pairs are easily generated with a keyboard which can be emulated with a cross-bar switch that can be field programmed. Memories such as EEPROMS or other arrangements such as automatic dialers now readily available in many telephone sets can also be used to generate tone pairs or sequences thereof. Automatic dialers generally are arranged or can be controlled to transmit five to ten or more tone pairs per second. A sequence of tone pairs may be easily and reliably decoded by a commercially available fast Fourier transform integrated circuit which is also ubiquitous in telecommunications and other technologies which utilize data transmitted as tones from telephone keypads.

Five tone pairs is adequate to uniquely identify each of one hundred thousand subscribers and additional digits which can be transmitted in a one-second time slot can be used for additional subscribers (e.g. six tone pairs for one hundred twenty thousand subscribers), set-up (e.g. a particular number or number group used to identify a transmission over the system and/or cover the 200 microsecond period of maximum system transmission delay), redundancy, channel selection at the central facility, error checking or recovery or additional information, as may be desired. However, at the present state of the telecommunications art, ten tone pairs transmitted in one second can be reliably decoded with good operating margins.

It should be appreciated that while the invention is described in terms of the preferred implementation utilizing commercially available hardware and circuitry, any tone-coded arrangement is suitable for the practice of the invention. It is only necessary to provide and discriminate a number (e.g. ten) of tones in a short sequence to provide a unique coded identification for each subscriber. This can be easily accomplished at low bandwidth (compatible with a low frequency carrier signal alluded to above by many different circuit designs which will be apparent to those skilled in the art.

Time slots are defined independently but synchronously at the central station 22 and at the directional couplers by a universal time base at each location. These universal time bases are readily available commercially at low cost and are synchronized by radio transmissions from the National Bureau of Standards which is received over a small antenna. A suitable time base unit

(which is preferably battery powered) is marketed under the name of "The Time Machine" by Oregon Scientific, 19861 S. W. 55th Place, Tualatin, Oregon. individual time slots may be identified by simply counting the one-second intervals derived from this unit. It should be appreciated that such counting to identify a time slot corresponding to a particular cable drop need only be performed at the directional coupler or, less desirably, the cable drop.

Thus, in summary, when a monitored condition is detected at a cable drop, a signal is sent from the cable drop to the directional coupler to which it is connected. The time base and counter at the directional coupler 14 identifies a time slot associated with the cable drop and, if a signal has been received therefrom when the time slot of the cable drop is reached, a tone or tone pair sequence generated, for example, in the same manner as an automatic dialer is sent from the directional coupler upstream to the central facility 22. The tone or tone pair sequence received by the central facility is decoded (e.g. in the manner of telephone keypad data) and recorded with a simple and inexpensive printer for appropriate action to be taken.

It should be appreciated that, in the preferred implementation, only well-known and commercially available, low cost circuits are required. Essentially all circuits other than the crystal oscillator and counter and the time base and counter are a subset of the circuits available in telephone sets. Further, the number of transmitters is reduced by performing the upstream signalling from the directional couplers rather than the cable drops, which also avoids a need to provide bidirectional signalling at the

directional couplers, as well. Operating margins have been proven adequate though experience in the telecommunications industry. Therefore, the cost per cable drop is very low (e.g. the cost for hardware adequate to monitor four cable drops would be significantly less than the retail price of a single telephone set having a redial feature). Other standard telephone hardware and circuitry is adequate for installation and field programming of the transmitters.

It should also be appreciated that the system in accordance with the invention is extremely flexible in regard to cable drop polling frequency consistent with very large operating margins. For example, using a one-second time slot, each of one hundred twenty thousand cable drops could be individually monitored in about one hour and forty minutes using only a single "channel" at the central facility per sector, assuming twenty sectors operating concurrently. Ninety thousand cable drops (approximating a generally average number of actual subscribers to the CATV system of Figure 1) could be individually monitored in one hour (and using one fewer tone pair for cable drop identification; yielding a 20% increase in discrimination time per tone pair).

If a decrease in polling frequency is tolerable, fewer channels can be provided in the central facility (e.g. one channel for each pair of CATV system sectors) with no decrease in operating margins since six tone pairs are capable of uniquely identifying one million cable drops. While central facility hardware is simple and inexpensive (essentially a decoder and a printer for each channel) this flexibility can easily accommodate periods for routine maintenance and repair or substitution of hardware elements.

Conversely, provision of more than one channel per sector can increase operating margins and multiply polling frequency for little additional expenditure in hardware. By the same token, the system in accordance with the invention can be implemented by degrees, particularly as the number of subscribers increases, while maintaining reasonably and acceptably high polling frequency and operating margins. Time base counter cycles may be readily modified by downstream signalling, for example, by latching one or more most significant bits of the counter or comparator to increase the polling frequency by integral powers of two.

Having described the basic principles and operation of the invention, a preferred implementation will now be described with reference to Figures 2 - 4. Referring first to Figure 2, the entire communication path including a CATV system with the upstream communication link in accordance with the invention and superimposed thereon is schematically shown. For ease of identification of parts of the standard CATV system, decoupling capacitors 31 are shown to indicate the high frequency, broadband communication path even though such capacitors may or may not be employed. The relatively low frequency carrier preferred for implementation of the invention can generally be transmitted upstream through powering points 30 or otherwise since such capacitors, if and where employed, are generally of small value and intended principally to block ~~the~~ ^{the} voltage which is used to power various elements of the system and transmitted over the signal cable at 30 or 60 volts (supplied by local transformer 32, resistor 33 and diode 34) which can be separated to power repeaters 38 and the

like.

More specifically, the CATV system which forms the preferred environment for the invention includes a CATV transmitter section 20, one or
5 more intermediate line distribution sections 30 having repeaters/amplifiers 38 with powering points schematically depicted as transformer 32, resistor 33 and diode 34 (power may also be derived from power supplies powered from an
10 electric utility), a termination section 40 having a directional coupler 41 and individual cable drops and decoders/set top boxes (STBs) 42a - 42d, collectively indicated at 15. The CATV system may also include a more or less broadband upstream
15 link represented by upstream receiver 22. The upstream link is optional and unimportant to the understanding or practice of the invention other than that the upstream link of the invention does not interfere with it.

20 In accordance with the invention, the central facility 20 includes a time base 23, described above, a tone decoder 28 (e.g. tone pair to ASCII) and a printer/recorder or other annunciator such as a display 29. However, it is considered
25 preferable but not necessary to include a time slot counter 24, a polling frequency control 25, a synchronization reset transmitter 26 and an error checking device 27. If employed, counter 24 will develop a number for each time slot which can be
30 compared to data transmitted from the directional couplers to detect the expected correspondence. This feature may be useful, for example, to avoid tampering. Polling frequency control 25 may be used to assure correspondence between operation of
35 time slot counter 24 at the central station, if used, and/or the counting sequence at remote time slot counters 24' (e.g. by latching digits as

alluded to above).

These perfecting feature of the invention are preferably supported by a reset synchronization transmitter 26 which emits, for example, a pulse or tone burst to reset the remote time slot counters 24' of all directional couplers so that the counts of all counters 24, 24' will be the same. It will be recalled from the foregoing that the time bases 23, 23' will be synchronized by detection of a common radio signal or the like but may or may not have the facility for providing a particular time indication at reasonably short intervals to which the counters may be synchronized. The synchronization reset transmitter provides a convenient and inexpensive facility for synchronizing the counters, if desired, and may use any desired count of counter 24 to do so, such as being responsive to a transition of the most significant bit (MSB) of the counter output.

Use of such a transition (e.g. rollover or carry) of the MSB is also convenient for changing the polling frequency at controller 25. For example, the polling frequency transmitter could be used to simply select the counter bit which will be treated as most significant and reset all counters accordingly while transmitting a pulse or tone burst downstream to alter comparator function correspondingly at the directional couplers 14 or, more generally, 40.

The distribution section 30 of Figure 2 includes repeaters or amplifiers and power points to provide power for them. These elements compensate for losses in the length of cable over which signals are distributed and are usually placed at more or less regular intervals in the distribution system. As indicated above, these

elements will generally pass relatively low frequency signals such as the 25 KHz carrier signal preferred for practice of the invention and cable losses will generally be low at such frequencies. Nevertheless, it may be desirable to include upstream repeaters 37, preferably including band-pass filters 36, to enhance the upstream signalling in accordance with the invention.

In this regard, it is considered to be a further perfecting feature of the invention to also include a battery 35, preferably of the lithium type, and a trickle charging arrangement such as diode 34 and resistor 33. If a repeater 37 and/or filter 36 is employed, they are preferably powered from the battery in the event of failure of the power distributed over the cable system. Power may also be provided downstream from battery 35 to supplement other batteries and charging arrangements 48 in the directional couplers and increasing robustness of the system.

At the location 40 of the cable drops 15, the directional coupler 14' in accordance with the invention also includes a time base 23' and counter 24' as described above to allow the time slots corresponding to the respective ones of cable drops 15 to be identified. Generally four cable drops are provided from the conventional portion 41 of each such directional coupler and connected to STBs 42a - 42d.

This portion 41 of the directional coupler is shown in greater detail in Figure 3. In accordance with the invention, each cable drop/STB 42a - 42d includes a CATV decoder 50 and a condition monitor or detector 43, 43a - 43d, more particularly shown in Figure 4. A transmitter for a broadband upstream link may also be included in

the STB but is not illustrated since its presence or absence is irrelevant to the invention. The details of the condition detector are also unimportant to the invention and any arrangement suitable for detecting the condition of interest, such as loss of power or signal loss or noise ingress may be employed. Any type of signalling back to the directional coupler 14' may be employed for one or more condition detectors.

It should be understood that it is preferred that no signal be transmitted over the system 10 during the time slot for any particular cable drop if the monitored condition or conditions are nominally correct since there is generally no need for a report of nominal operation. However, such a signal confirming nominal operation could be transmitted, if desired. Accordingly, it is preferred that no signal be provided from detector 43 in the absence of a condition indicating a malfunction.

When a signal is emitted at any time, however, it is detected and latched at 44 to await a time slot for transmission. A unique address or identification number for each cable drop is stored in comparators 45 while time slot number are generated by counter 24'. The addresses and identification numbers may be field programmed at installation in a manner identical, in the preferred implementation of the invention, to the setting of a speed dialer or a redial mechanism of an ordinary telephone having either facility. When a correct comparison is made, the comparator provides an output to a circuit such as a speed dialing or redialing circuit 46 which outputs a sequence of tones or tone pairs. (If more than a single condition is to be reported, one or more additional tones or tone pairs may be output to

indicate a any of a plurality of conditions of a combination thereof. To do so, the latches, comparators and dialers can be replicated for each cable drop or combinations of latches for each
5 cable drop could be encoded or the like.)

The sequence of tones or tone pairs are then used to modulate a carrier frequency at modulator 47. As shown in greater detail in Figure 3, modulator 47 is preferably comprised of a crystal
10 oscillator 47a controlled by crystal 47d, a divide-by-one hundred counter 47b and a modulating amplifier 47c. The resulting signal is transmitted upstream to the central station, possibly through one or more filters 36 and
15 repeaters 37. At the central station, the signal is demodulated in any known fashion and decoded by a tone to digital code (e.g. ASCII) decoder 28 which can then be applied directly to a printer. Again, such decoders are known from the
20 telecommunications industry and are commercially available at low cost.

Such decoding can be provided in many other ways, as well, which will be evident to those skilled in the art and could even be done in
25 software on a personal computer. However, decoding for direct printing is preferred as being of least cost and, if the invention is implemented in multiple sections in accordance with CATV system sectors 16, of greatest convenience since
30 the sectors will be geographically defined and printed reports will be geographically correlated to the sectors and thus convenient for field repair personnel. In this regard, when the invention is implemented in plural sections or
35 channels, time slots are simultaneously provided to cable drops in different sections and may have similar or identical addresses or identifications.

However, reporting of signalling remains unique within a section or sector. Therefore, no ambiguity is engendered between sections or addresses.

5 In view of the foregoing, it is seen that the
condition monitoring system in accordance with the
invention provides a flexible and operationally
robust arrangement capable of monitoring a very
10 large number of locations with flexible polling
frequency that can be made arbitrarily high. The
system can be implemented at very low cost by use
of existing hardware and circuits and operating
margins have been demonstrated to be adequate for
extremely high reliability in the
15 telecommunications industry. The system cannot
interfere with other downstream or upstream
broadband communications and requires only
extremely limited bandwidth. The system, in its
preferred form can operate for a substantial
20 period of time from battery power independent of
power outages and interruptions and is resistant
to tampering and spurious signals as well.

 While the invention has been described in
terms of a single preferred embodiment and
25 implementation, those skilled in the art will
recognize that the invention can be practiced with
modification within the spirit and scope of the
appended claims.

2025-12-10 14:10:10

CLAIMS

Having thus described my invention, what I claim as new and desire to secure by Letters Patent is as follows:

- 1 1. A signal distribution system including
2 a communication path between a central
3 facility including a signal source to a plurality
4 of cable drops,
5 a condition detector at each of said
6 plurality of cable drops,
7 means for providing a sequence of tones
8 responsive to said condition detector,
9 means for coupling said sequence of tones to
10 said communication path during a time slot
11 determined by a time base, and
12 means for decoding said sequence of tones at
13 said central facility.
- 1 2. A system as recited in claim 1, wherein said
2 means for providing said sequence of tones
3 provides a sequence of tone pairs.
- 1 3. A system as recited in claim 2, wherein said
2 means for decoding provides a digital signal input
3 to a printer.
- 1 4. A system as recited in claim 1, wherein said
2 condition detector detects at least one of power
3 outage and ingress.
- 1 5. A system as recited in claim 1, wherein said
2 system is divided into a plurality of sectors.

1 6. A system as recited in claim 1, wherein said
2 time base is provided at a directional coupler
3 providing communication links to a plurality of
4 said cable drops.

1 7. A system as recited in claim 1, wherein said
2 time base includes a counter for counting time
3 slots.

1 8. A system as recited in claim 7, further
2 including a comparator responsive to said counter
3 for identifying time slots corresponding to
4 respective ones of said plurality of cable drops .

1 9. A system as recited in claim 8, further
2 including
3 means for latching an output of said
4 condition detector and wherein said comparator is
5 responsive to an output of said means for latching
6 and said counter for controlling said means for
7 generating said sequence of tones.

1 10. A system as recited in claim 1, further
2 including
3 a time base at said central facility, and
4 means for counting time slots at said central
5 facility.

1 11. A system as recited in claim 10, further
2 including
3 means for comparing an output of said means
4 for counting time slots at said central facility
5 and an output of said means for decoding said
6 sequence of tones.

[illegible][illegible][illegible][illegible]

0800-967-0800



- 1 23. A method as recited in claim 18, wherein said
2 sequence of tones include a sequence of tone
3 pairs.

CABLE DROP MONITOR WITH UPSTREAM SIGNALLING

ABSTRACT OF THE DISCLOSURE

5 A time slot is provided for each terminal
unit or cable drop of a signal distribution system
in a repeated sequence to communicate detected
conditions "upstream". The time slots are defined
10 in accordance with a time base responsive to
broadcast time signals. An identification of each
terminal unit is transmitted from a directional
coupler corresponding to the terminal unit or
cable drop after latching an output of a condition
15 detector responsive to detection of a condition by
a sequence of tones or tone pairs, preferably
using circuits ubiquitous in the
telecommunications industry. A printer is
provided for each channel at a central facility
20 and the transmitting terminal unit is identified
in response to another time base operating
synchronously with the time base defining the time
slots and assigning the time slots to respective
terminal units. Provision is made for
synchronization of counters, error checking and
control of polling frequency.

FIG.1

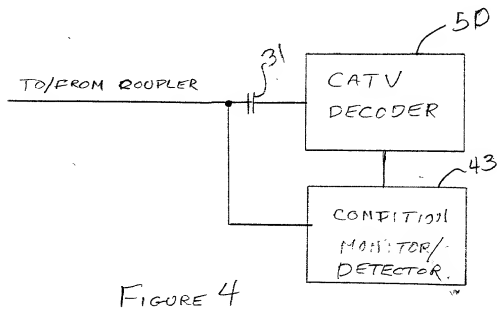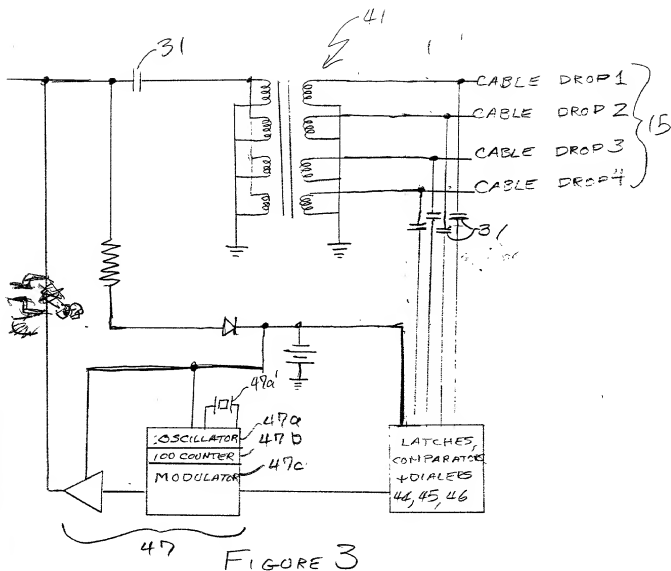

Docket No.
05380003AA

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
CABLE DROP MONITOR WITH UPSTREAM SIGNALLING

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

None

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

C. Lamont Whitham - Reg. No. 22,424

Marshall M. Curtis - Reg. No. 33,138

Michael E. Whitham - Reg. No. 32,635

Send Correspondence to: **Marshall M. Curtis, Esq.**
Whitham, Curtis & Whitham
11810 Sunrise Valley Drive - Suite 900
Reston, Virginia 20191

Direct Telephone Calls to: *(name and telephone number)*
Marshall M. Curtis - (703) 391-2510

Full name of sole or first inventor Warren L. Braun	
Sole or first inventor's signature <i>Warren L. Braun</i>	Date <i>6/20/00</i>
Residence 680 New York Avenue, Harrisonburg, Virginia 22801	
Citizenship U.S.A.	
Post Office Address Same As Above	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	